



Orwak 5030

Benefits

- Savings on your waste collection
- Tidy premises
- Space saving

Features

- Top loading
- Small machine
- Single phase
- The "bag compactor"
- Bag protected during compaction process




Technical specifications

Dimensions

5030

- A: 1940 mm
- B: 785 mm
- C: 1005 mm
- D:* 2660 mm
- E: 1100 mm

*Emptying position

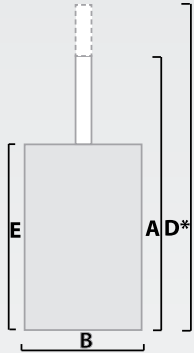

Loading aperture

ø500 mm

Cycle time

36 secs

Press force

3 ton, 30 kN

Chamber dimension (internal)

Width: ø500 mm
Height: 800 mm

Weight (machine)

Total: 310 kg

Noise level

< 62 db (A)

Protection class

IP 55

Operating power

Single Phase 230 V, 50 Hz, 10 A

Paint

Two-part paint and powder coat with phosphatising as base

Oil volume/type

8,2 l ISO VG 32-68 SAE 10 from +5 °C and warmer

Hydraulic data

Working pressure: 110 bar
Relief pressure: 140 bar
Press force: 3 ton, 30 kN
Piston stroke: 790 mm
Press force per cm²: 1,5 kg

The classic compactor

In 1971 Orwak invented the unique idea of putting the bag "outside" of a steel, open ended drum. This design means that a plastic bag can be used for most types of waste - despite the fact that the press force is three tons.

Big reduction in volume


In 30 seconds your waste is reduced by up to 10:1. That means better hygiene and a better working environment, more free space and better safety at work. Not to mention drastically reduced costs of collection and transport. The Orwak 5030 is also available in special models for liquid separation for the food industry, for environmentally hazardous waste and for marine use.



Emptying height 2 660 mm standard, 2 360 mm option. For shorter versions contact Orwak.

The compact size of the 5030 makes it easy to locate even in limited spaces.

A compacted and well sealed bag prevents leakage and odours. User friendly and flexible.

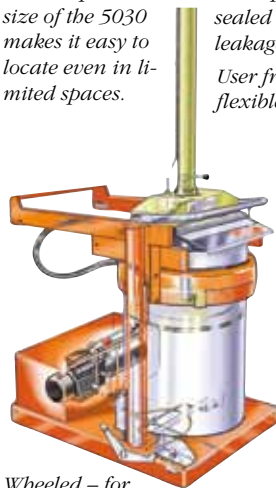

Optional steel containers for safe handling of for example tins and glass after compaction.

Critical parts made from stainless steel.

Wheeled - for easy cleaning.

Developed from wide experience

Our 5000 serie is built from wide experience in all business situations. Some of the functions that influence the choice of machine are compact size, improved hygiene and reliable operation.

A simple to use option - The Orwak bale/bag lifter. Eliminates manual heavy lifting.

Our promise to You!

- Orwak financial solutions
- Orwak non-stop service

For further information please contact Your local Orwak dealer.

The Orwak 5030 takes care of most of your waste

Paper

- Cardboard
- Shredded
- Paper sacks

Metal Cans

- Aluminium cans
- Food cans
- Paint cans

Other metals

- Steel straps

Plastic foil

- Shrink film
- Plastic bags

Plastic containers

- PET bottles
- Jugs/bottles

Other plastics

- Plastic straps

Semi-dry Waste

- Bagged general waste

Wet

- Juice boxes,
- Tetra paks

Special

- Steel drums
- Hazardous waste

- Perfect choice
- OK
- Other materials contact us

For more info. contact us or visit our website www.orwak.com
We reserve the right to make changes to specifications without prior notice.
Bale/bag/bin weights are dependent upon material type.



AB Orwak

Box 58, SE-576 22 Sävsjö, Sweden

Tel: +46 382-157 00, Fax: +46 382-106 07

E-mail: info@orwak.se



www.tomra.com